


TET

HIGH PERFORMANCE TEX-TAPE AVAILABLE IN MULTIPLE COLOURS

- Extremely wear-resistant against abrasion
- Superb resistance to tape curl
- Due to high tack adhesive it adheres to a wide variety of substrates
- Easy to apply and hand tears in rectangular lines
- Moisture resistant and does not absorb water
- Easy to write on

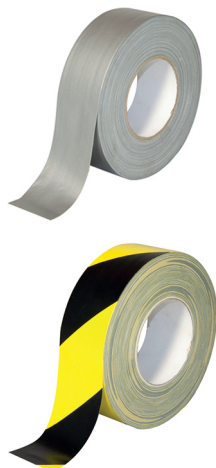

NOTICE

All information including images are given with the greatest care. Still, it is appropriate to users regardless of the test the suitability of each product for their own purposes. Tech-Masters is not liable for the completeness and accuracy of information and refuses warranty for your specific use. The guarantee, which Tech-Masters products provide, relates only to the standard conditions of sale of this product. In no case Tech-Masters can be held responsible for incidental damages, or damages for improper use or sale of the product to another customer.

TEX-TAPE

GENERAL INFORMATION

TEX-TAPE is premium grade 70 mesh TAPE with an aggressive adhesive formula.

TEX-TAPE makes it suitable for repairing and construction work, etc.

TECHNICAL INFORMATION AND PACKAGING

TEX-TAPE YELLOW/BLACK, WHITE/RED

Adhesive: Natural rubber-synthetic resin blend

Base material: Woven cloth/polyester with polyethylene coating

Colours: yellow/black, white/red

Liner: No liner

Adhesion to steel: 9,8 N/25 mm

Tensile strength: 137N/25 mm

Thickness: 0,3 mm

Temperature resistance: -15°C to +50°C

Short term (1 h) temperature resistance: +80°C

Elongation max: 11,5%

Mesh: 80

UV resistance: Limited

Shelf life:

Clean and dry in a well ventilated area, preferably at a temperature between +10°C and +30°C. Stored under these conditions shelf life will be a minimum of 6 months.

TEX-TAPE

Adhesive: Natural rubber-synthetic resin blend

Base material: Woven cloth/polyester with polyethylene coating

Colours: black, white, red, yellow, blue, green, silver

Liner: No liner

Adhesion to steel: 9,8 N/25 mm

Tensile strength: 161,8 N/25 mm

Thickness: 0,3 mm

Service temperature range: -15°C to +50°C

Elongation max: 11,5%

Mesh: 70

UV resistance: Limited

Shelf life:

Clean and dry in a well ventilated area, preferably at a temperature between +10°C and +30°C. Stored under these conditions shelf life will be a minimum of 6 months.






APPLICATION AND USE

• APPLICATION

Automotive, aerospace, military, general industrial, MRO, facilities management, transportation, marine, commercial vehicle, RV, bus, truck, ship yards, metal working, furniture, electronics, solar, trailer manufacturing and woodworking
Lane marking, floor marking, safety coding, hazard marking, identifying, sealing, color coding, bundling, holding, reinforcing, identifying, tabbing, wrapping, splicing and protecting

• USE

Temperature: between -5°C and +35°C. Surface must be clean and free from dust and grease. Avoid touching the tapes exposed adhesive surface in order to keep full adhesive performance. Pressure sensitive adhesive must be applied with a maximum of pressure in order to achieve maximum pressure level. The indicated level of performance will be reached after a bonding period of 24h at +23°C

Article nr	Name	Content	Section
			
			



TAPES

WWW.TECH-MASTERS.EU

