


# TGR

## HIGH-TECH SPRAYABLE GREASE FOR DISMOUNTING AND MOUNTING OF TYRES

- Practical spray can, which excludes product pollution and formation of bacteria.
- Necessary for the latest tyre technology such as low tread, PAX, ...
- Simplifies dismantling and mounting.
- Pleasant fragrance and does not dry out.
- Does not affect aluminium, metal or rubber.
- Can be used for ALL tyres.

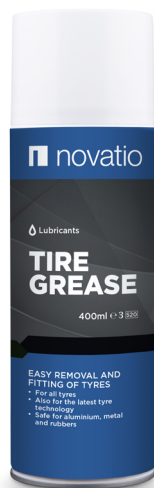

## NOTICE

All information including images are given with the greatest care. Still, it is appropriate to users regardless of the test the suitability of each product for their own purposes. Novatio is not liable for the completeness and accuracy of information and refuses warranty for your specific use. The guarantee, which Novatio products provide, relates only to the standard conditions of sale of this product. In no case Novatio can be held responsible for incidental damages, or damages for improper use or sale of the product to another customer.

# TIRE GREASE

## GENERAL INFORMATION

TIRE GREASE is a high-tech sprayable grease for mounting and dismantling of tyres.  
TIRE GREASE is packed in a practical spray can which excludes product pollution and formation of bacteria. The practical aerosol ensures that you do not need a brush anymore to apply the

grease and it also prevents hardened grease pots. TIRE GREASE can be used safely on steel, aluminium, rims and does not affect rubber. TIRE GREASE simplifies the dismantling of refractory tyres. TIRE GREASE dries quickly and prevents slippage of the tyre in the rim.

## TECHNICAL INFORMATION AND PACKAGING

Fusion point: 0°C.  
Boiling point: 100°C - 221°C.  
pH-value: 8.  
Appearance: fluid.  
Flashpoint: 70°C.

Spontaneous ignition: 255°C.  
Colour: transparent-white.  
Shelf life: 12 months, keep dry, cool and frost-proof.  
Safety measures: consult the Safety Data Sheet.

## APPLICATION AND USE

- high technological lubricant for the mounting of tyres, rubber hoses, rubber-metal elements, ...

Article nr	Name	Content	Section
N233981	Tire Grease	400ml	LUBRICANTS

